

SPECIFICATION

Range: **SNOWFIX**
Design: **Caimi Lab**

“Snowsound Technology” sound-absorbing element, suspended from the ceiling with cables.

Panel description:

Both faces with convex section 36 mm thick, consisting of an internal padding in variable density polyester fiber. The density decreases moving towards the heart of the panel, which is covered on both sides with Trevira CS® polyester fabric, solidly applied to the padding. The panel is double sided, with same characteristics on both sides. It is characterized by the rigid edge obtained by the manufacturing process itself, without any supporting and/or stiffening frame.

The panel has an **Italian Class1** fire reaction and **Euroclass B-s2, d0**.

The panel is **Greenguard Gold** certified, which validates its low VOC emission and its contribution to the quality of the indoor environment.

The panel is **100% recyclable** and has no detectable formaldehyde content according to UNI EN 717-2. It does not contain felts or other organic materials that are hardly recyclable.

The panel has been tested in reverberation chamber according to UNI EN ISO 354 and obtained “**Acoustic Absorption Class A**”, in accordance with UNI EN ISO 11654.

Panels dimensions:


75x44 cm	59x59 cm	119x119 cm
119x44 cm	75x59 cm	119x159 cm
139x44 cm	119x59 cm	
159x44 cm	159x59 cm	
179x44 cm	179x59 cm	

All formats can be used both vertically and horizontally

Support description:


Painted zamak bracket to be fixed directly to the panel using 4x30 self-tapping screws. The bracket has a notched slot for screw/nail attachment.

1 pezzo per dimensioni pannello:



44 x 75
44 x 119
44 x 139
44 x 159
44 x 179
59 x 59
59 x 75
59 x 119
59 x 159
59 x 179

2 pezzi per dimensioni pannello:



44 x 75
44 x 119
44 x 139
44 x 159
44 x 179
59 x 75
59 x 119
59 x 159
59 x 179
119 x 119
119 x 159




Fronte



Retro



Available colors:

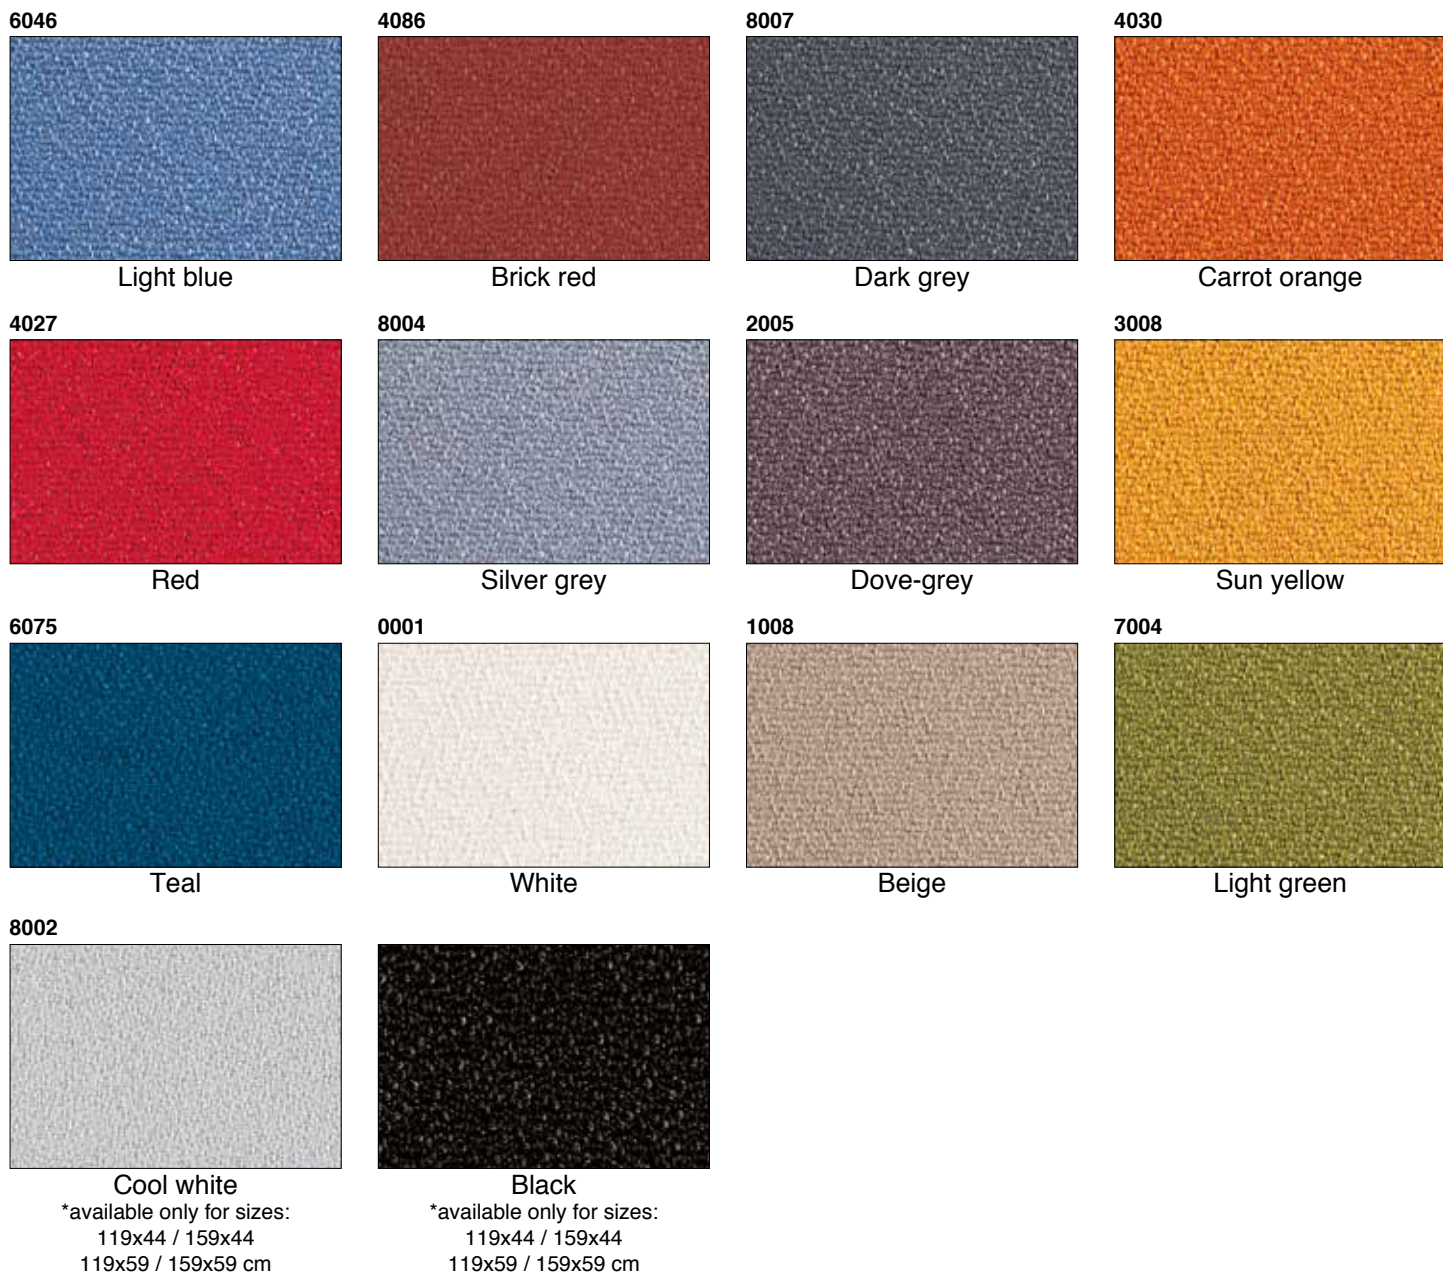

* ATTENTION: dimension 179x59 cm available only for colors Light Blue (6046) - Silver Grey (8004) - Dark Grey (8007)